



Self-lubrication Roller Chains & Side Bow Chains

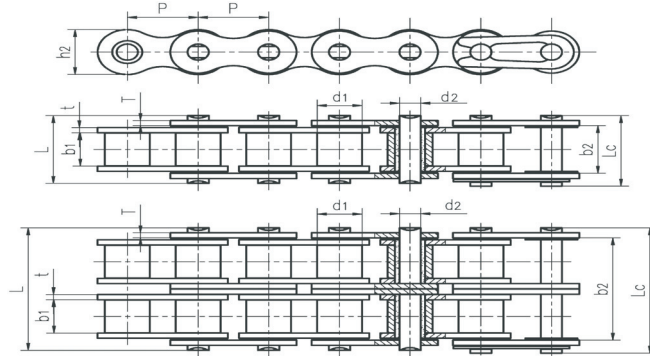

Self-lubrication Roller Chains

Chain Number	Pitch (P)	Roller Diameter (d1)	Width between Inner Plate (b1)	Width between Outer Plate (b2)	Pin Diameter (d2)	Pin Length (L)	Pin Length (Lc)	Inner Plate Depth (h2)	Plate Thickness (t/T)	Ultimate Tensile Strength (Q)	Weight (q)
	mm	max mm	min mm	min mm	max mm	max mm	max mm	max mm	max mm	kN	kg/m
60SLR	19.050	11.91	12.57	19.35	5.94	27.50	29.30	18.00	3.25/2.42	34.20	1.65
12BSLR	19.050	12.07	11.68	16.80	5.72	23.60	25.30	16.00	1.85	29.00	1.20
16BSLR	25.400	15.88	17.02	27.50	8.28	38.10	40.60	21.00	1.85	60.00	2.72
60SLR-2	19.050	11.91	12.57	42.13	5.94	50.30	52.10	18.00	4.15/3.10	68.40	3.21
12BSLR-2	19.050	12.07	11.68	36.26	5.72	43.10	62.60	16.00	3.25/2.42	58.00	2.38
16BSLR-2	25.400	15.88	17.02	59.38	8.28	70.00	72.50	21.00	4.15/3.10	120.00	5.40

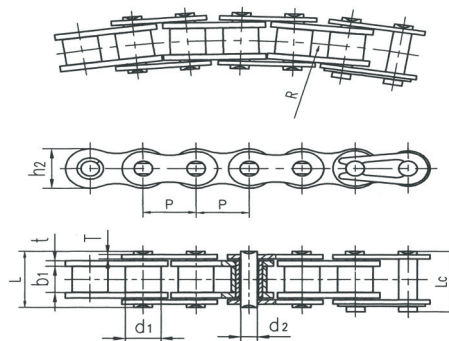

Side Bow Chains

ISO Number	Pitch (P)	Roller Diameter (d1)	Width between Inner Plate (b1)	Pin Diameter (d2)	Pin Length (L)	Pin Length (Lc)	Inner Plate Depth (h2)	Plate Thickness (t/T)	Side Bow Radius (R)	Ultimate Tensile Strength (Q)	Average Tensile Strength (Qo)	Weight (q)
	mm	max mm	min mm	max mm	max mm	max mm	max mm	max mm	min mm	kN	kN	kg/m
40SB	12.700	7.95	7.85	3.96	16.90	18.10	11.70	1.50	350	13.80	15.2	0.80
43SB	12.700	7.95	7.85	3.45	18.30	19.50	11.70	1.50	305	12.00	13.2	0.64
50SB	15.875	10.16	9.40	4.37	20.70	22.70	15.09	2.03	400	20.60	22.7	1.09
60SB	19.050	11.91	12.57	5.34	26.60	28.40	18.00	2.42	500	15.70	17.3	1.42
63SB	19.050	11.91	12.68	5.08	28.80	30.60	17.20	2.42/2.03	350	12.50	13.8	1.40
08BSB	12.700	8.51	7.75	3.97	17.40	18.70	11.80	1.60	400	14.00	15.4	0.70
08BSBF1	12.700	8.51	7.75	3.97	16.30	17.60	11.80	1.60/1.20	400	12.80	14.1	0.65
10BSB	15.875	10.16	9.65	4.50	20.10	21.50	14.70	1.70	400	15.60	17.2	0.93
12BSB	19.050	12.07	11.68	5.12	23.10	24.80	16.00	1.85	500	20.50	22.6	1.16
C2050SB	31.750	10.16	9.40	5.08	21.30	22.60	15.00	2.03	800	21.80	24.1	1.09