


Stainless Steel Hollow Pin Chains

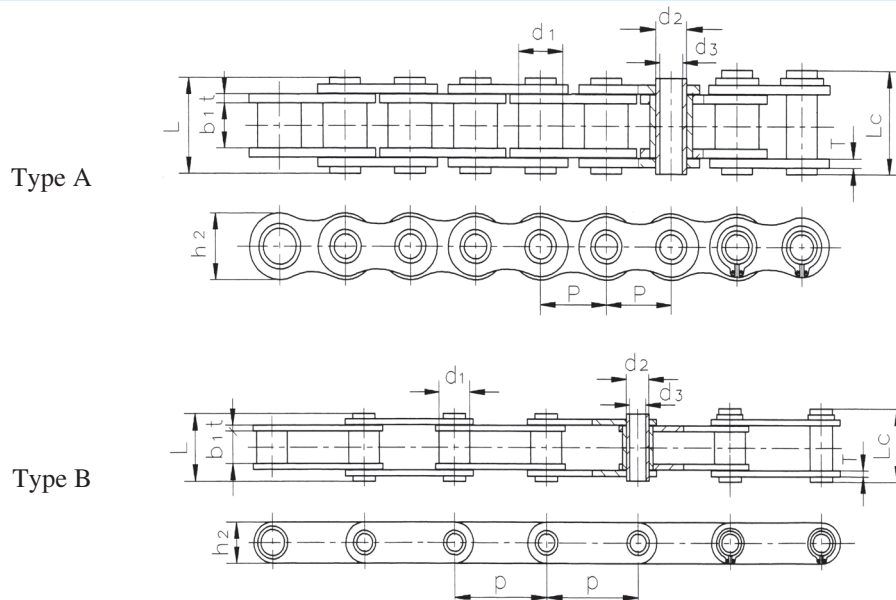

Chain Number	Pitch (P)	Bush Diameter (d1)	Width between Inner Plate (b1)	Pin Diameter (d2)	Pin Diameter (d3)	Pin Length (L)	Pin Length (Lc)	Inner Plate Depth (h2)	Plate Thickness (t/T)	Ultimate Tensile Strength (Q)	Average Tensile Strength (Qo)	Weight (q)	Type
	mm	max mm	min mm	max mm	max mm	max mm	max mm	max mm	max mm	kN	kN	kg/m	
08BHPFSS	12.700	8.51	7.75	6.55	4.50	16.40	17.60	11.80	1.60/1.30	7.80	8.5	0.57	A
40HPSS	12.700	7.95	7.85	5.63	4.00	16.50	17.60	12.00	1.50	7.70	8.5	0.55	A
50HPSS	15.875	10.16	9.40	7.03	5.13	20.70	21.90	15.09	2.03	14.00	15.4	0.92	A
60HPSS	19.050	11.91	12.70	8.31	6.00	25.80	26.80	18.00	2.42	16.80	18.5	1.31	A
*12BHPSS	19.050	12.07	11.68	6.50	4.00	21.60	22.80	15.90	1.85	16.50	18.2	1.10	A
80HPSS	25.400	15.88	15.75	11.40	8.05	32.50	33.80	24.00	3.25	35.00	38.7	2.29	A
C2040HPSS	25.400	7.95	7.85	5.63	4.00	16.50	17.60	12.00	1.50	7.70	8.6	0.47	B
C2050HPSS	31.750	10.16	9.40	7.22	5.12	20.50	21.80	15.00	2.03	14.30	15.7	0.77	B
C2060HPSS	38.100	11.91	12.70	8.31	6.00	25.80	26.80	17.00	2.42	16.80	18.6	1.03	B
C2080HPSS	50.800	15.88	15.75	11.40	8.05	32.50	33.80	24.00	3.25	35.00	38.0	1.83	B
HB50.8SS	50.800	30.00	10.50	11.40	8.20	27.40	28.60	26.00	3.10	35.00	38.5	2.60	

* Roller Chain: d₁ in the table indicate the external diameter of the roller