



Leaf Chains

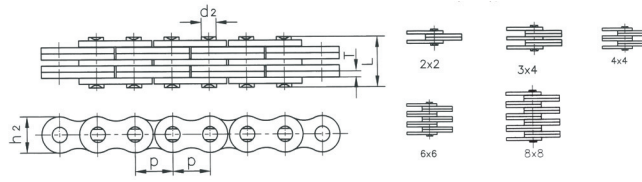

ISO Number	Pitch (P)	Chain Lacing	Inner Plate Depth (h2)	Plate Thickness (T)	Pin Diameter (d2)	Pin Length (L)	Ultimate Tensile Strength (Q)	Average Tensile Strength (Qo)	Weight (q)
	mm		max mm	max mm	max mm	max mm	min kN	kN	kg/m
AL322	9.525	2x2	7.70	1.30	3.58	6.80	9.00	10.20	0.23
AL344	9.525	4x4	7.70	1.30	3.58	11.60	18.00	20.00	0.46
AL422	12.700	2x2	10.40	1.50	3.96	8.30	14.10	16.90	0.39
AL444	12.700	4x4	10.40	1.50	3.96	14.40	28.20	35.20	0.74
AL466	12.700	6x6	10.40	1.50	3.96	20.50	42.30	52.70	1.13
AL522	15.875	2x2	12.80	2.03	5.08	11.05	22.00	27.5	0.64
AL534	15.875	3x4	12.80	2.03	5.08	17.00	33.00	46.0	1.10
AL544	15.875	4x4	12.80	2.03	5.08	19.40	44.00	55.0	1.25
AL566	15.875	6x6	12.80	2.03	5.08	27.50	66.00	82.5	1.79
AL622	19.050	2x2	15.60	2.42	5.94	13.00	37.00	44.4	0.86
AL644	19.050	4x4	15.60	2.42	5.94	22.70	66.70	78.8	1.76
AL666	19.050	6x6	15.60	2.42	5.94	32.20	100.10	118.6	2.60
AL688	19.050	8x8	15.60	2.42	5.94	42.20	133.40	156.6	3.49
AL822	25.400	2x2	20.50	3.25	7.92	16.00	56.70	68.6	1.54
AL844	25.400	4x4	20.50	3.25	7.92	29.40	113.40	135.6	3.00
AL866	25.400	6x6	20.50	3.25	7.92	44.20	170.00	202.3	4.46
AL1022	31.750	2x2	25.60	4.00	9.53	19.60	88.50	107.1	2.37
AL1044	31.750	4x4	25.60	4.00	9.53	36.40	177.00	203.6	4.68
AL1066	31.750	6x6	25.60	4.00	9.53	52.30	265.00	315.3	7.20
AL1088	31.750	8x8	25.60	4.00	9.53	68.50	354.00	421.2	9.94
AL1222	38.100	2x2	30.50	4.80	11.10	24.30	127.00	151.1	3.65
AL1244	38.100	4x4	30.50	4.80	11.10	43.80	254.00	299.7	7.05
AL1266	38.100	6x6	30.50	4.80	11.10	63.20	381.00	426.3	10.50
AL1288	38.100	8x8	30.50	4.80	11.10	82.60	508.00	568.4	14.03
AL1444	44.450	4x4	36.40	5.60	12.64	51.30	372.70	413.6	10.34
AL1466	44.450	6x6	36.40	5.60	12.64	74.56	559.00	620.4	15.16
AL1644	50.800	4x4	41.60	6.40	14.21	58.00	471.00	522.8	12.98
AL1666	50.800	6x6	41.60	6.40	14.21	83.80	706.00	783.6	19.76
AL1688	50.800	8x8	41.60	6.40	14.21	109.50	942.00	1,045.5	25.47

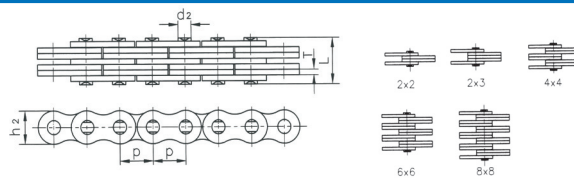

ISO Number	Pitch (P)	Chain Lacing	Inner Plate Depth (h2)	Plate Thickness (T)	Pin Diameter (d2)	Pin Length (L)	Ultimate Tensile Strength (Q)	Average Tensile Strength (Qo)	Weight (q)
	mm		max mm	max mm	max mm	max mm	min kN	kN	kg/m
FL644	5.940	4x4	4.700	0.600	1.850	6.60	6.50	7.80	0.13
FL666	5.940	6x6	4.700	0.600	1.850	9.30	9.75	11.80	0.20
FL688	5.940	8x8	4.700	0.600	1.850	12.00	13.00	15.60	0.25
FL844	8.000	4x4	6.900	0.730	2.310	7.90	10.00	12.10	0.25
FL944	9.525	4x4	8.700	1.040	3.280	10.40	21.00	24.70	0.43
FL966	9.525	6x6	8.700	1.000	3.280	14.90	31.00	36.80	0.65
F122	12.700	2x2	8.200	1.000	3.580	7.00	11.43	13.60	0.19
FL1223	12.700	2x3	10.200	2.030	4.450	12.80	20.00	23.80	0.61
FL1244	12.700	4x4	10.200	1.700	4.450	16.70	44.00	52.30	0.83
F19V-44	19.050	4x4	15.200	2.420	6.500	22.40	71.00	84.30	1.73
F19V-66	19.050	6x6	15.200	2.420	6.500	32.30	106.00	125.90	2.57