



Double Pitch Conveyor Chains

Small roller type

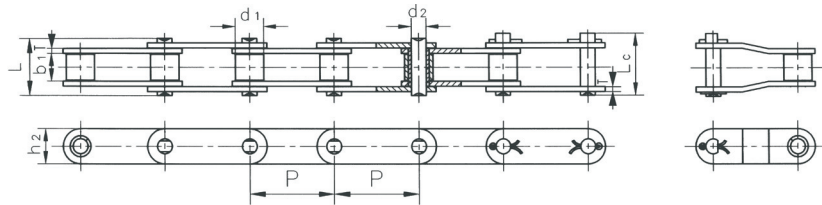

Large roller type

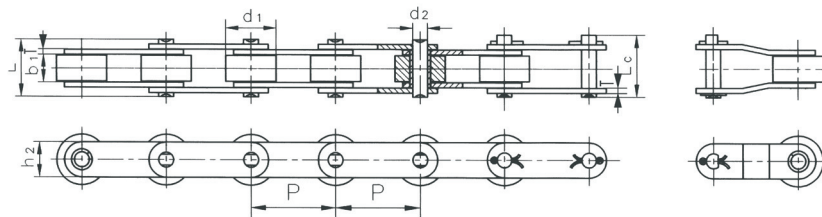

ISO Number	ANSI Number	Pitch (P)	Roller Diameter (d1)	Width between Inner Plate (b1)	Pin Diameter (d2)	Pin Length (L)	Pin Length (Lc)	Inner Plate Depth (h2)	Plate Thickness (T)	Ultimate Tensile Strength (Q)	Average Tensile Strength (Qo)	Weight (q)
		mm	max mm	min mm	max mm	max mm	max mm	max mm	max mm	kN	kN	kg/m
C208A	C2040	25.400	7.95	7.85	3.96	16.60	17.80	12.00	1.50	14.10	16.70	0.50
C208AL	C2042	25.400	15.88	7.85	3.96	16.60	17.80	12.00	1.50	14.10	16.70	0.84
C208AH	C2040H	25.400	7.95	7.85	3.96	18.80	19.90	12.00	2.03	14.10	17.20	0.65
C208B		25.400	8.51	7.75	4.45	16.70	18.20	11.80	1.60	18.00	19.40	0.55
C208BL		25.400	15.88	7.75	4.45	16.70	18.20	11.80	1.60	18.00	19.40	0.89
C210A	C2050	31.750	10.16	9.40	5.08	20.70	22.20	15.00	2.03	22.20	28.10	0.78
C210AL	C2052	31.750	19.05	9.40	5.08	20.70	22.20	15.00	2.03	22.20	28.10	1.27
C212A	2060	38.100	11.91	12.57	5.94	25.90	27.70	18.00	2.42	31.80	36.80	1.12
C212AL	C2062	38.100	22.23	12.57	5.94	25.90	27.70	18.00	2.42	31.80	36.80	1.61
C212AH	C2060H	38.100	11.91	12.57	5.94	29.20	31.60	18.00	3.25	31.80	41.60	1.44
C212AHL	C2062H	38.100	22.23	12.57	5.94	29.20	31.60	18.00	3.25	31.80	41.60	2.07
C216A	C2080	50.800	15.88	15.75	7.92	32.70	36.50	24.00	3.25	56.70	65.70	2.08
C216AL	C2082	50.800	28.58	15.75	7.92	32.70	36.50	24.00	3.25	56.70	65.70	3.12
C216AH	C2080H	50.800	15.88	15.75	7.92	36.20	39.40	24.00	4.00	56.70	70.00	2.54
C216AHL	C2082H	50.800	28.58	15.75	7.92	36.20	39.40	24.00	4.00	56.70	70.00	3.58
C220A	C2100	63.500	19.05	18.90	9.53	40.40	44.70	30.00	4.00	88.50	102.60	3.01
C220AL	C2102	63.500	39.67	18.90	9.53	40.40	44.70	30.00	4.00	88.50	102.60	4.83
C220AH	C2100H	63.500	19.05	18.90	9.53	43.60	46.90	30.00	4.80	88.50	112.40	3.56
C220AHL	C2102H	63.500	39.67	18.90	9.53	43.60	46.90	30.00	4.80	88.50	112.40	5.38
C224A	C2120	76.200	22.23	25.22	11.10	50.30	54.30	35.70	4.80	127.00	147.30	4.66
C224AL	C2122	76.200	44.45	25.22	11.10	50.30	54.30	35.70	4.80	127.00	147.30	7.66
C224AH	C2120H	76.200	22.23	25.22	11.10	53.50	57.50	35.70	5.60	127.00	160.90	5.26
C224AHL	C2122H	76.200	44.45	25.22	11.10	53.50	57.50	35.70	5.60	127.00	160.90	8.26
C232A	C2160	101.600	28.58	31.75	14.27	64.80	69.60	47.80	6.40	226.80	278.90	8.15
C232AL	C2162	101.600	57.15	31.75	14.27	64.80	69.60	47.80	6.40	226.80	278.90	13.00
C232AH	C2160H	101.600	28.58	31.75	14.27	68.20	73.00	47.80	7.20	226.80	285.80	9.06
C232AHL	C2162H	101.600	57.15	31.75	14.27	68.20	73.00	47.80	7.20	226.80	285.80	12.77